

PinPointR 3D

Professional 3D GPR Made Simple



25.4 kg / 56 lbs
One-person portability

Professional
3D results

Efficient
in the field

The Easier Path to Professional 3D GPR

Finally, 3D GPR without the complexity.

For years, professional 3D GPR has delivered exceptional results – but for many surveyors it remained too heavy, too complex, and too difficult to adopt.

PinPointR 3D changes that.

Professional 3D GPR is now accessible to more survey professionals than ever before.

By combining true one-person portability, a tablet-driven workflow, and trusted ImpulseRadar performance, PinPointR 3D makes professional 3D GPR easier to transport, easier to learn, and easier to use – without compromising data quality.



Portable

A lightweight 25.4 kg platform designed for one-person transport and deployment.



Simple

Compact, practical and designed to fit naturally into your everyday workflow.




Professional

An 8-channel architecture delivering high-quality 3D data.

Designed Around the Way You Survey

Engineered to simplify every stage of the survey workflow.

From transportation and deployment to data acquisition and interpretation, every element has been designed to improve productivity while maintaining high-quality results expected from professional GPR surveys.

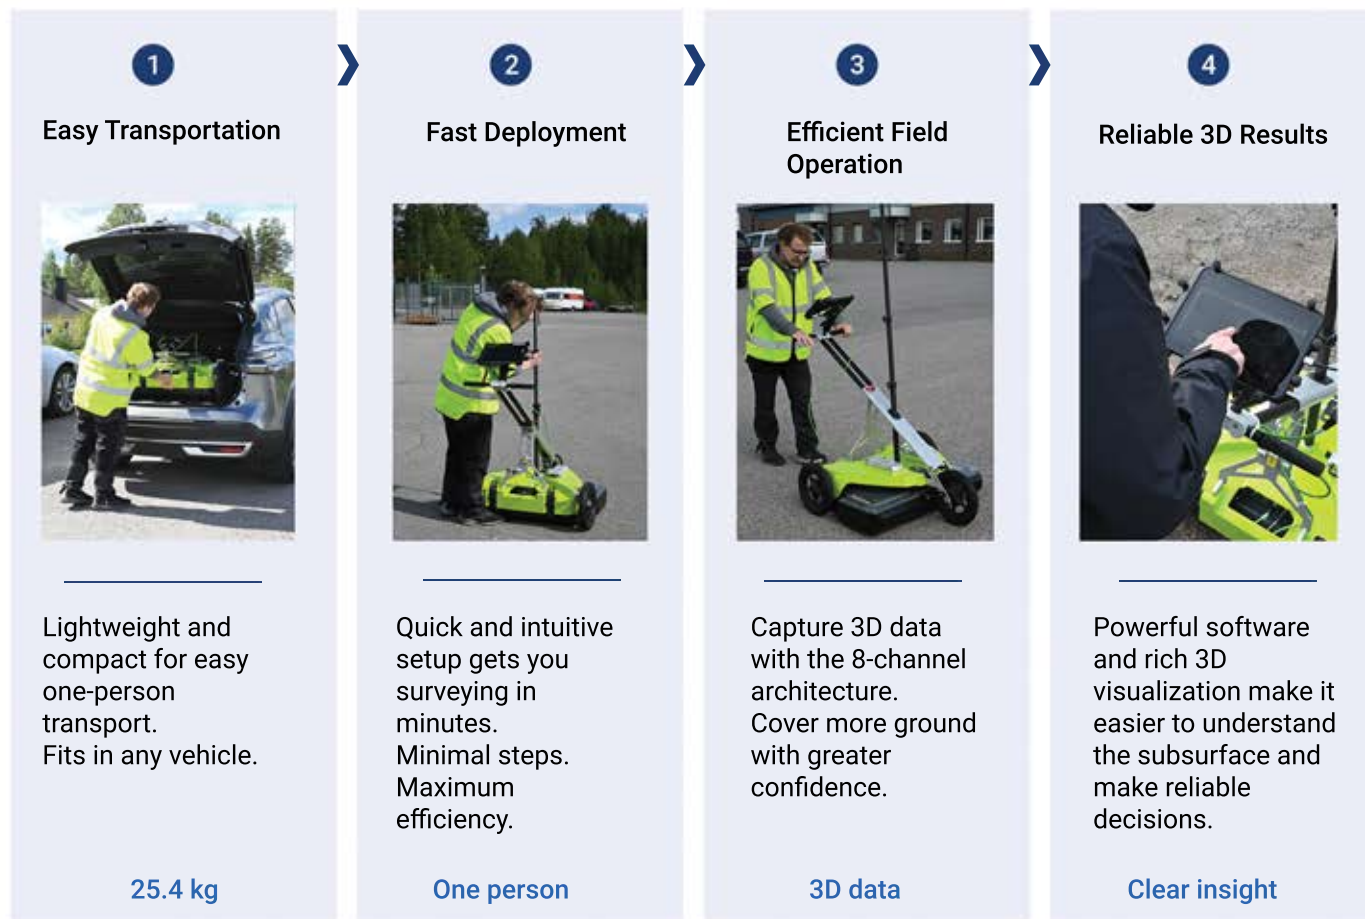

Meet ViewPoint 2

A new app designed to make professional 3D surveying simple.

ViewPoint 2 is the new generation of ImpulseRadar data acquisition software, developed as the acquisition platform for PinPointR 3D.

From survey and data acquisition to in-field visualization, ViewPoint 2 brings the workflow


Less time learning.
More time surveying.



Condor - Turn data into insights

From field data to actionable results

PinPointR 3D works seamlessly with ImpulseRadar's software ecosystem - from intuitive data acquisition in ViewPoint 2 to advanced processing, visualization, and interpretation in Condor software.

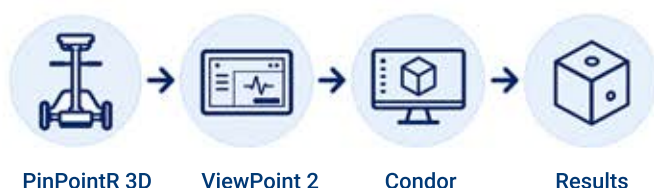

Process, visualize, and interpret your PinPointR 3D datasets in Condor. Powerful processing and visualization tools help transform collected data into clear subsurface insights for confident interpretation and delivery.



Technical Specifications

Weight	25.4 kg / 56 lbs (Cart, Antenna)
Frequency	450 MHz
Channels	8 channels
Swath coverage width	59 cm (center-to-center between channel 1 and 8)
Battery	Li-Ion 12V / 1.3 Ah
Survey speed	>130 km/h @ 5 cm point interval
Dimensions (folded for transport)	870 × 540 × 370 mm
Dimensions (in use)	1010 × 540 × 1030 mm (raised handlebar)
Operating temperature	-20 °C to +50 °C / -4 °F to +122 °F
Warranty	2 years
Acquisition software	ViewPoint 2
Recommended post-processing software*	Condor / Geolitix
Regulatory	CE, FCC & IC approved
GPS support	Integrated support for GPS (int./ext.), NMEA 0183 protocol



ImpulseRadar products are under continuous development and we reserve the right to change specifications at any time and without prior notice. You may verify product specifications at any time by contacting our headquarters via our website.

* Other compatible post-processing software may also be used.